

STENHØJ Bench Press



For Service- & repair shops

The STENHØJ Bench Press is with its functional design and simple operation considered the most up-to-date and versatile press on the market for service- and repair shops.

Standard equipment:

- Single-acting cylinder
- Pressure gauge
- Replaceable nose cap
- 2 V-blocks/straightening blocks

Options:

- 2-stage hand pump unit
- 2-stage foot pump unit
- 1-stage motorized pump unit

Function and operation:

- Hand- and foot pump unit with change-over valves for low-pressure, high-pressure and return
- Motorized pump unit with infinite pressure and Speed regulation, proportional to hand control lever position

Optional extras:


- Console



STENHØJ

MODEL		BP16	BP25
Press force, max.	kN	160	250
Stroke	mm	180	180
Daylight, max.	A mm	260	260
HAND- AND FOOT PUMP UNIT			
Speed/stroke LP/HP	mm	6/1	4/0,5
Return speed	mm/s	30	18
Oil reservoir capacity	L	2	2
Net weight, approx.	kg	141	141
MOTORIZED PUMP UNIT			
Width	mm	275	
Press speed	mm/s	10	
Return speed	mm/s	15	
Motor effect, 3x400V, 50 Hz	kW	2,2	
Oil reservoir capacity	L	25	
Net weight, approx.	kg	220	
CONSOLE			
Net weight, approx.	kg	79	79

Subject to change without notice.

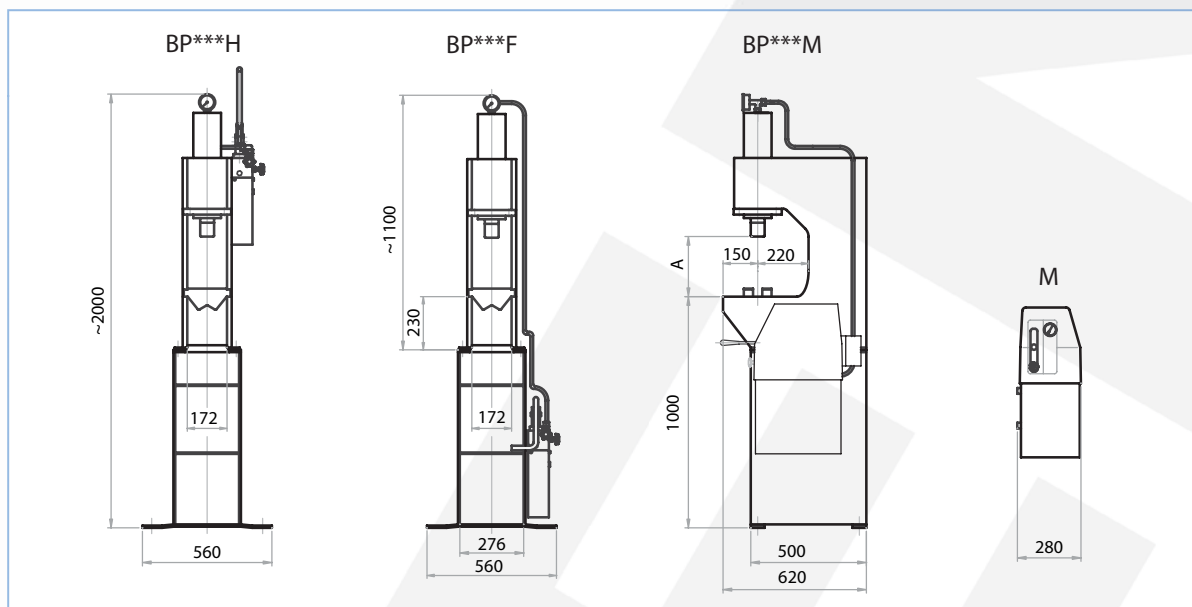

STENHØJ

STENHØJ HYDRAULIK A/S

DK-7150 Barrit

Phone: +45 7682 1322 • Fax: +45 7682 1300

hydraulik@stenhoj.dk • www.stenhoj.dk